

## 产品简介

感谢您购买Olight LED手电筒，在使用前请仔细阅读说明书，本说明书适用于S10-L2 Baton。

Olight S10指挥家2013升级版，LED更新为最新的CREE XM-L2，并优化结构与操作界面，极大的提升了产品性能，是你EDC手电的最佳选择。

## 包装清单

手电 x1, 备用O圈 x2, 挂绳 x1, 硅胶垫 x1, 说明书。

## 产品部件 (见Figure 1)

## 操作说明 (见Figure 2, 3)

## 电池安装:

按照Figure 2 所示装入电池, 电池正极朝向手电头部。

## 使用手电:

手电具有月光、低、中、高四个亮度级别以及暴闪。

### 关机状态下, 3种方式开启手电:

- 1) 快速单按侧按键, 手电开启, 输出记忆亮度;
- 2) 持续按住按键1秒, 输出月光亮度;
- 3) 快按两次按键, 输出高亮。

### 改变手电输出:

- 1) 若持续按住按键, 输出按月光 -> 低 -> 中 -> 高 -> 低... 顺序依次循环, 按键释放时, 输出选定亮度。
- 2) 快速双按侧按键输出暴闪(不记忆), 在暴闪状态下持续按退出暴闪返回记忆的亮度。

### 锁按键与解锁:

上锁操作: 关机时按住按键1秒, 在开启月光后持续再按住1秒, 输出关闭, 进入锁键状态。

解锁操作: 持续按下按键1秒, 解锁并开启月光。

注意: 按键在上锁状态下, 不会响应用户操作, 除非是解锁操作。

## 运行曲线 (见Figure 4)

## 如何替换S10-L2 Baton尾盖的磁铁 (见Figure 5)

## 规格参数

材料	铝合金, 表面三级硬质氧化
尺寸	长70.5毫米, 直径23.0毫米,
重量	42克(不带电池)
LED	CREE XM-L2 LED
电池	1 x CR123A 或 1 x RCR123A
输出亮度及运行时间	400流明/1小时15分钟 85流明/7.5小时 5流明/108小时 0.5流明/360小时
特殊模式	暴闪: 10Hz
中心光强度	2,700 cd
最大射程	104米
防水	IPX 8
抗冲击	2米

备注: 使用 1节 3.0V 1500mAh CR123A锂电池测试

## 保修条款

### 细则说明:

1. 本细则适用于Olight品牌的手电及配件产品。凡通过正规渠道购买的Olight产品, 均享受本公司提供的免费保修或有限保修售后服务;

2. 任何产品或配件经过改装、不当使用或由非Olight随产品提供的电池漏液导致产品无法使用, Olight将不承担其保修责任;

### 保修承诺:


1. 30天保换期: Olight手电产品自售出之日起30天内(以购买发票或者其它有效购买单据上的日期为准), 在正常使用情况下, 出现产品质量问题, 客户可选择更换新品及部件, 或维修服务;

2. 5年免费保修期: Olight手电产品自售出之日起5年内(以购买发票或者其它有效购买单据上的日期为准), 用户在正常使用情况下, 出现产品质量问题, 则享受免费维修服务;

3. 终身有限保修: 在超过5年免费保修期时间外, Olight将提供有偿保修, 更换配件及运输费用由用户承担, 不另收取人工费用;

4. 电池质保: Olight为随产品提供或单独销售的可充电电池提供1年(以购买发票或者其它有效购买单据上的日期为准)质保;

5. 用户保修时凭Olight保修条款及购买有效单据与经销商联系, 由经销商对消费者提供服务, 我公司将对经销商提供服务支持;

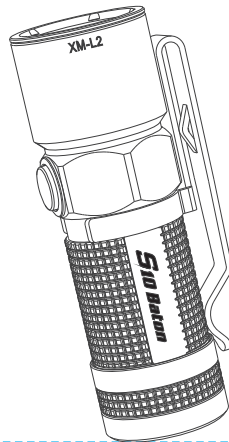

LED FLASHLIGHT  
Model: S10-L2 Baton  
CREE XM-L2 LED

EN User's manual

中文 用户手册

# ENGLISH

## Brief introduction

Thank you for purchasing the Olight S10-L2 Baton flashlight. Please read this manual carefully before using this product.

Olight S10 BATON got upgraded to 2013 edition, its LED changed to the latest in CREE XM-L2, both the structure and user interface were optimized, the performance were greatly raised. It is the best choice of your EDC flashlights.

## Pack List

Flashlight x1, Spare O-Rings x 2, lanyard x1, Silicone pad x1, Manual.

## Product parts

 ( See Figure 1 )

## Operational instruction

 ( See Figure 2, 3 )

**Battery Installation:** Insert the battery into the flashlight, refer to Figure 2, the battery positive towards light head.

**Operate your light:** There are adjustable brightness levels: moonlight-low-middle-high and strobe

### A) There are three ways to start up, under "OFF" status:

- 1 ) To quickly press side switch once to start up and output memorized brightness level.
- 2 ) To hold down side switch for 1 second to activate moonlight mode.
- 3 ) To quickly double press side switch to activate high mode.

### B) Brightness level change :

- 1 ) If keep on holding down side switch, output changes in a circle of "moonlight-low-middle-high-low..."; while release to confirm the mode.
- 2 ) Quickly double press side switch to activate strobe (cannot be memorized), while normal press to quit and return to memorized mode.

### C) Lock and unlock :

**Lock operation:** with the flashlight off, to hold down side switch for 1 second to activate moonlight mode, and then 3. press the side switch for another second without a stop to turn off output and the flashlight is in lock-out state.

**Unlock operation:** after locking out, just to hold down side switch for 1 second to unlock and activate moonlight mode.

Tips: side switch is invalid when the flashlight is in lock-out state, unless users are carrying out unlock operation.

## Output VS Runtime

 ( See Figure 4 )

## How to remove the magnet of S10-L2 Baton

 ( See Figure 5 )

## Specifications

Material	Aluminum body with anti-scratching type III Hard Anodization
Dimension	(L)70.5 mm, (D)23.0mm
Weight	42g(without battery)
LED	Cree XM-L2 LED
Battery	1 x CR123A or 1 x RCR123A
Output And Runtime	400 lumens /1h15min 85 lumens /7.5h 5 lumens /108h 0.5 lumens /360h
Special Mode	Strobe 10Hz
Peak Beam Intensity	2,700 cd
Beam Distance	104m
Waterproof	IPX 8
Impact Resistance	2m

Note: Testing with 1 piece of 3.0V 1,500mAh CR123A

## Warranty

Olight warrants its products to be free from defects in materials and workmanship. Within 30 days of receipt, any defective lights will be offered repair or replacement by the retailer where the product was purchased. Olight will repair or replace, at its option and without charge, any product or part which is found to be defective under normal use and service within 5 years counting from the date of purchasing with proof of purchase. Such repair or replacement shall be the purchaser's sole and exclusive remedy under this warranty. This warranty does not cover normal maintenance and service and does not apply to any products or parts which have been subject to modification, misuse, negligence, accident, improper maintenance or repair by anyone other than Olight. As to those exceed 5 years of the purchase date, Olight will still provide with warranty service. Labor is free but cost of parts will be charged. This warranty covers parts and labor only as specified above. Freight and transit costs are the responsibility of the user/owner, not the factory or dealer.



**Olight Technology Co., Limited**  
Address: 2/F East, Building A, B3 Block,  
Fuhai Industrial Park, Fuyong, Bao'an  
District, Shenzhen, China 518103  
Tel: +86-755-81452608/81452618  
Fax: +86-755-81452508  
E-mail: service@olightworld.com  
www.olightworld.com

**深圳市欧莱特科技有限公司**  
地址: 深圳市宝安区福永镇福海工业区  
B3区A栋二楼东  
电话: 0755-81452608/81452618  
传真: 0755-81452508  
E-mail: service@olightworld.com  
www.olightworld.com



Made In China