

Olight Marauder 2



- Max 14,000 lumens with an 800-meter beam distance
- Toggle switch to quickly change from spotlight and floodlight modes
- Knob switch for instant activation and output changes
- USB-C rechargeable for quick charging or power bank function discharging

GENERAL DATA

Beam Distance (ft)	2,625
Beam Distance (m)	800
Max. Performance (lumens)	14,000
Charge type	USB-C Charging Cable
Compatible Batteries	Customized Three 3.6V 5000mAh 21700 Rechargeable Lithium-ion Batteries (Built-in)
Light Intensity (candela)	50,600 (Floodlight); 160,000 (Spotlight)
Light Form	High Performance Cool White LEDs
Lens / Reflector Type	TIR Lens & Converging Lens
Mode Operation	Rotary Knob Switch & Toggle Switch
Form/Size Factor	Medium Size
Series	Series MARAUDER
LIGHTING LEVELS (Floodlight)	
LEVEL 1 (lumens)	200

Olight Marauder 2

GENERAL DATA

200 lumens;

Run-time LEVEL 1

- **40 hours** - run-time
- 755 cd - intensity
- 55m - beam distance

LEVEL 2 (lumens)

400

400 lumens;

Run-time LEVEL 2

- **22 hours** - run-time
- 1,400 cd - intensity
- 75 m - beam distance

LEVEL 3 (lumens)

800

800lm;

Run-time LEVEL 3

- **13 hours**- run-time
- 3,000 cd - intensity
- 110 m - beam distance

LEVEL 4 (lumens)

1,600

1,600lm;

Run-time LEVEL 4

- **450 Minutes** - run-time
- 6,000 cd - intensity
- 155 m - beam distance

LEVEL 5 (lumens)

3,200~1,600~800~400~200

3,200~1,600~800~400~200lm;

Run-time LEVEL 5

- **90+90+10+10+70 Minutes** - run-time
- 11,550 cd - intensity
- 215 m - beam distance

LEVEL 6 (lumens)

6,400~3,200~1,600~800

6,400~3,200~1,600~800lm;

Run-time LEVEL 6

- **195Minutes** - run-time
- 22,500 cd - intensity
- 300 m - beam distance

LEVEL 7 (lumens)

14,000~3,200~1,600

14,000~3,200~1,600lm;

Run-time LEVEL 7

- **5+140+45 Minutes** - run-time

Olight Marauder 2

GENERAL DATA

- 50,600 cd - intensity
- 450 m - beam distance

LIGHTING LEVELS (Spotlight)

LEVEL 1 (lumens) 50
50 lumens;

Run-time LEVEL 1

- **59hours** - run-time
- 10,000 cd - intensity
- 200m - beam distance

LEVEL 2 (lumens) 100
100 lm;

Run-time LEVEL 2

- **31hours** - run-time
- 22,500 cd - intensity
- 300 m - beam distance

LEVEL 3 (lumens) 200
200lm;

Run-time LEVEL 3

- **19hours** - run-time
- 40,000 cd - intensity
- 400 m - beam distance

LEVEL 4 (lumens) 300
300lm;

Run-time LEVEL 4

- **700minutes** - run-time
- 62,500 cd - intensity
- 500 m - beam distance

LEVEL 5 (lumens) 500~300~200~100~50~6
500~300~200~100~50~6lm;

Run-time LEVEL 5

- **360+25+15+80+110minutes** - run-time
- 90,000 cd - intensity
- 600 m - beam distance

LEVEL 6 (lumens) 650~500~300~200~100
650~500~300~200~100lm;

Run-time LEVEL 6

- **115+180+20+20+85minutes** - run-time
- 122,500 cd - intensity

Olight Marauder 2

GENERAL DATA

- 700 m - beam distance

LEVEL 7 (lumens)

850~650~500~300~200~100
850~650~500~300~200~100lm;

Run-time LEVEL 7

- **20+170+85+25+15+85minutes** - run-time
- 160,000 cd - intensity
- 800 m - beam distance

Strobe

Yes, 6,400 lumens, 13Hz

SOS / BEACON

No

TECHNICAL CHARACTERISTICS

Waterproof

IPX8

Weight (g / oz)

750 / 26.5

Length (mm / in)

140 / 5.51

Head Diameter (mm / in)

79 / 3.11

Body Diameter (mm / in)

53 / 2.09

Led

TIR Lens & Converging Lens

Packaging


Gift Box

Use

Search and Rescue, Outdoors, Military, Law Enforcement

- Marauder 2 (Batteries Built-in) x 1
- 0.8-meter USB-C(C2C) Cable x 1
- Power Adapter x 1
- Lanyard x 1
- User Manual x 1

Package Contents

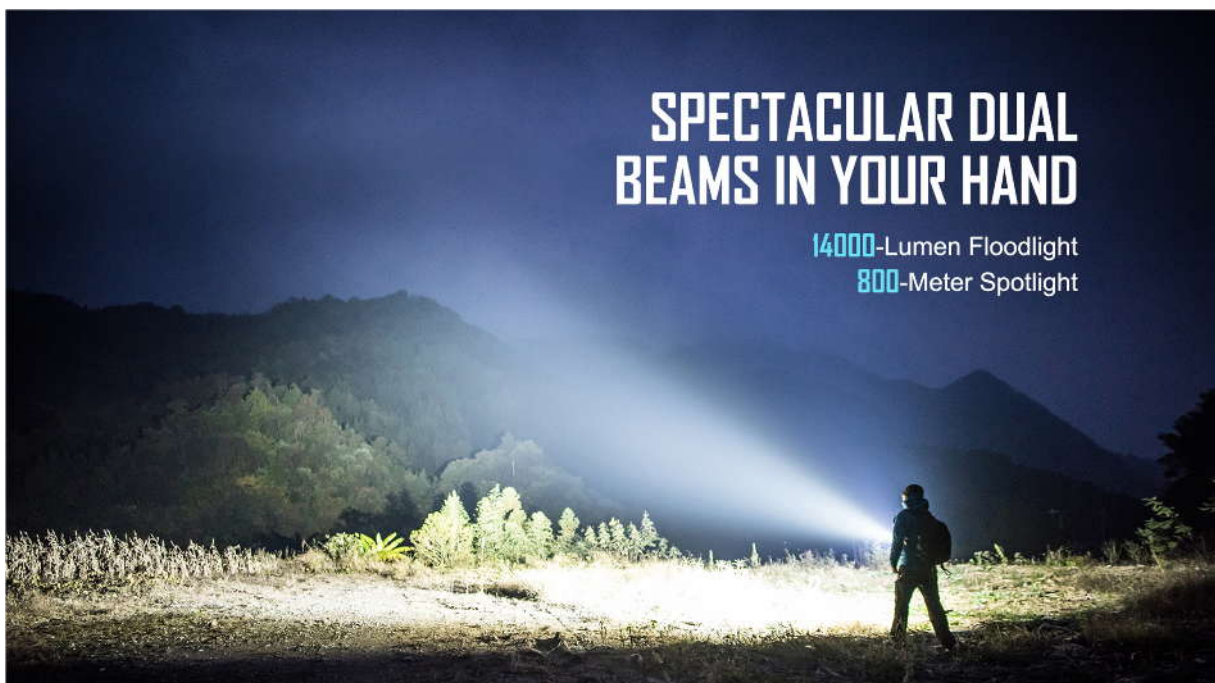

Olight Marauder 2

FLIP BETWEEN FLOOD AND THROW

A simple toggle switch to select each light form.

Flip it up for
max distance



Flip it down for
max lumens




FLIP BETWEEN FLOOD AND THROW

A simple toggle switch to select each light form.

Flip it up for
max distance



Flip it down for
max lumens

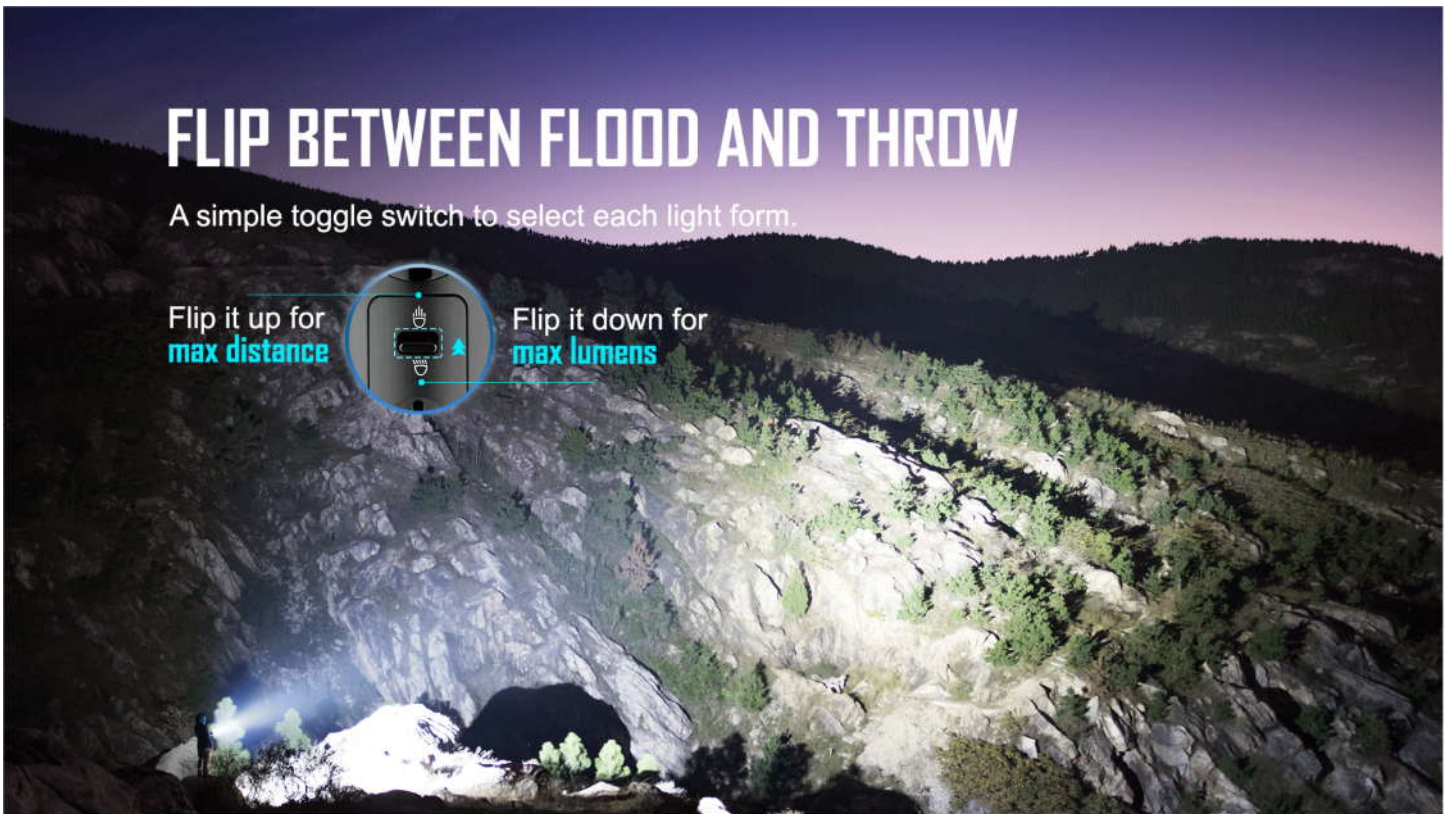

Olight Marauder 2

INTUITIVE OPERATION AND INDICATORS

Rotary knob to circle through 7 brightness levels and a simple indicator dashboard.



Olight Marauder 2



SMART LOCKOUT AND UNLOCKING

Gets locked out automatically after **30 seconds** of non-operation when the light is already off.

To unlock, rotate the knob switch over **90 degrees** quickly.



SAFEST IN ITS CLASS

In addition to cooling fins, the built-in thermal and proximity sensors keep the beast in check.



INGENIOUS PORT COVER

Like aperture blades, twist the tail cap counterclockwise or clockwise to open and close the USB port cover.



IMPACT-PROOF, WATERPROOF, DUSTPROOF

Durable aluminum alloy body that survives a **1-meter** drop.
IPX8 waterproof USB-C charging port shielded against dust by the port cover.



Olight Marauder 2

