

ENGLISH

Brief introduction

Thank you for purchasing the Olight S20 Baton flashlight. Please read this manual carefully before using this product.

Olight S20 Baton is a portable XM-L LED flashlight powered by 2 CR123A batteries (compatible with one 18650 rechargeable li-ion battery). It inherits S10 Baton's concise appearance style, extended tube body makes the product look more slim and straight. S20 Baton combines a cute side switch, strong magnetic flat tail, removable embrace clip, and low voltage indication, these make it more portable and more convenient.

Pack List

Flashlight x1, O-ring x1, lanyard x 1, battery magazine x 1, silicone gasket x 1, Manual (this manual).

Product parts (See Figure 1)

Operational instruction (see Figure 2)

Battery installation: Insert the battery into the flashlight, refer to Figure 1, the battery positive towards light head.

Operate your light: To turn off the light, click the button switch while the light is on status.

3 ways you can choose to activate the flashlight: 1). keep pressing the switch more than 1 second, the light is activated at moon light; 2). double click the switch will activate high; 3). single click will turn on the light and maintain the brightness level at the last use, it might be one of four brightness levels.

After the light turns on, if you keep pressing the button for 3 circles of "Low-Medium-High" till turn off, the switch will be locked out, quickly triple click the switch to unlock it, and output maintain the brightness in memory. No matter which brightness under on status, quickly double click the switch will activate strobe, there are 2 types of strobe, one is fixed 10Hz, one is 2Hz and 10Hz in turns, hold the switch will make switch between 2 strobes, the output is chosen until the switch is released.

中文

产品简介

感谢您购买Olight LED手电筒，在使用前请详细阅读说明书，本说明书适用于S20 Baton。

Olight S20 Baton是一款采用2节CR123A电池（兼容1节18650可充电电）供电的便携LED手电。它保持S10 Baton的简洁外观风格，筒身加长使产品看起来更纤细、笔挺。S20 Baton融合了头部侧按键与强磁吸附平底的外形构造，并加入可拆卸的强力抱夹和低压提示的功能，从便携与使用的角度来看，更胜于传统意义的小直。

包装清单

手电x1, 挂绳x1, 防水圈x1, 电池套x1, 硅胶垫x1, 说明书(本说明书)。

产品部件 (见Figure 1)

操作说明 (见Figure 2)

电池安装: 按照Figure1所示装入电池, 电池正极朝向手电头部。

使用手电: 开机状态下, 单按开关键, 手电输出关闭。

有三种开启手电方法: 1). 按下开关按键1秒以上, 手电输出月光; 2). 快速连按两次按键, 输出高亮; 3). 单按开关, 输出前次关机的亮度, 它可能是四种可选亮度之一。

开机后, 再次持续按住按键, 输出按照预设的顺序循环改变, 释放按键时选定输出, 预设顺序: 低亮—中亮—高亮; 若持续按住按键, 经历三个“低亮—中亮—高亮”循环后, 输出关闭, 进入锁键状态, 快速连按3次, 按解锁并输出先前记忆的亮度。

开机后, 无论在月光、低亮、中亮、高亮的任何模式下, 连续两次快速按击开关按键, 输出暴闪光; 暴闪分两种, 一种是固定的10Hz, 一种是2Hz与10Hz交替, 常按开关按键, 两种暴闪会切换, 释放按键选定输出。

运行曲线 (见Figure 3)



LED FLASHLIGHT
Model: S20 Baton
CREE XM-L LED

EN User manual

中文 用户手册


OLIGHT®
We Make A Difference

Specifications

Material	Aluminum body with anti-scratching type III Hard Anodization
Dimension	(L)106mm x (D)23mm
Weight	52g(without battery)
LED	Cree XM-L LED
Battery	2xCR123A or 1x18650
Reflector	Orange Peel Reflector
Output and Runtime (With 2 pcs 1500mAh 3V CR123A)	470 lumens/2h15min 100 lumens/9h 5 lumens/120h 0.5 lumens/25days
Special Mode	Fixed frequency: 10Hz, 470m Frequency Conversion: 2Hz+10Hz, 470m
Peak Beam intensity	2,500 cd
Beam Distance	100m
Waterproof	IPX 8
Impact resistance	2m

Warranty

Olight warrants its products to be free from defects in materials and workmanship. Within 30 days of receipt, any defective lights will be offered repair or replacement by the retailer where the product was purchased. Olight will repair or replace, at its option and without charge, any product or part which is found to be defective under normal use and service within 24 months counting from the date of purchasing with proof of purchase. Such repair or replacement shall be the purchaser's sole and exclusive remedy under this warranty. This warranty does not cover normal maintenance and service and does not apply to any products or parts which have been subject to modification, misuse, negligence, accident, improper maintenance or repair by anyone other than Olight. As to those exceed 24 months of the purchase date, Olight will still provide with warranty service. Labor is free but cost of parts will be charged. This warranty covers parts and labor only as specified above. Freight and transit costs are the responsibility of the user/owner, not the factory or dealer.

规格参数

材料	铝合金,表面三级硬质氧化
尺寸	长106毫米,直径23毫米
重量	52克(不带电池)
LED	Cree XM-L LED
电池	2xCR123A 或 1x18650
反光杯	橘酒杯
输出亮度及运行时间(使用2节1500mAh 3V CR123A 电池测试)	470流明/2小时15分钟 100流明/9小时 5流明/120小时 0.5流明/25天
特殊模式	变频暴闪: 10Hz 470lm 变频暴闪: 2Hz+10Hz 470lm
中心光强度	2500 cd
最大射程	100米
防水	IPX 8
抗冲击	2米

保修条款

细则说明:

1. 本细则适用于Olight品牌的手电及配件产品,凡通过正规渠道购买的Olight产品,均享受本公司提供的免费保修或有限保修售后服务;
2. 任何产品或配件经过改装、不当使用或由非Olight随产品提供的电池漏液导致产品无法使用, Olight将不承担其保修责任;

保修承诺:

1. 30天保换期: Olight手电产品自售出之日起30天内(以购买发票或其它有效购买单据上的日期为准),在正常使用情况下,出现产品质量问题,客户可选择更换新品及部件,或维修服务;
2. 2年免费保修期: Olight手电产品自售出之日起2年内(以购买发票或其它有效购买单据上的日期为准),用户在正常使用情况下,出现产品质量问题,则享受免费维修服务;
3. 终身有限保修: 在超过2年免费保修时间外, Olight将提供有偿维修,更换配件及运输费用由用户承担,不另收取人工费用;
4. 电池质保: Olight为随产品提供或单独销售的可充电电池提供1年(以购买发票或其它有效购买单据上的日期为准)质保;
5. 用户保修时凭Olight保修条款及购买有效单据与经销商联系,由经销商对消费者提供服务,我公司将对经销商提供服务支持;



Olight Technology Co., Limited
Address: 2/F East, Building A, B3 Block,
Fuhai Industrial Park, Fuyong, Bao'an
District, Shenzhen, China 518103
Tel: +86-755-81452518/81452608
Fax: +86-755-81452508
E-mail: service@olightworld.com
www.oightworld.com

深圳市欧莱特科技有限公司
地址:深圳市宝安区福永镇福海工业区
B3区A栋二楼东
电话: 0755-81452518/81452608
传真: 0755-81452508
E-mail: service@olightworld.com
www.oightworld.com



Made In China

Figure 1 Product parts & Battery installation 产品部件与电池安装

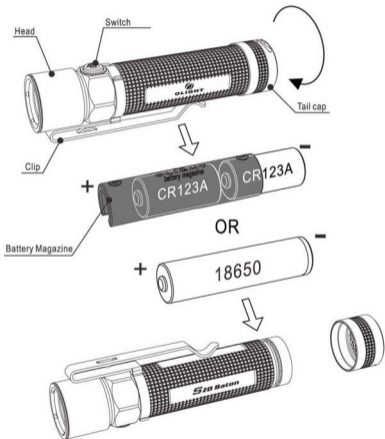


Figure 2 User interface 用户操作界面

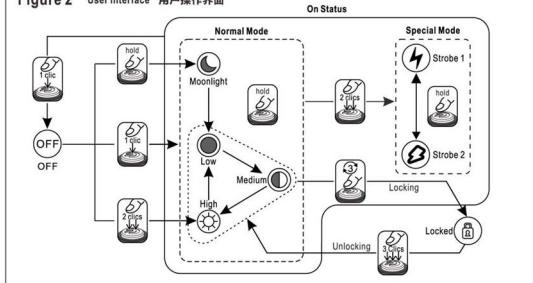


Figure 3 Output VS Runtime 运行曲线

