



\$ 79.95



OLIGHT
HIGH PERFORMANCE LED FLASHLIGHT
T15

- Super bright led (Cree/Rebel)
- Five brightness levels and two SOS flash modes and strobe
- Unique digital circuit control technique
- Auto-Remember the current brightness level when power is off
- Humanized operation



The OLIGHT T15 is a high quality professional led flashlight. Exquisite and powerful. Ideal for use in household, recreation and wherever you need a ingenious light.

Specification


1. Led type:Cree 7090 XR-E/Luxeon Rebel.
2. Function: Illumination, Strobe and SOS.

Mode	Brightness				
	level 1(time)	level 2(time)	level 3(time)	level 4(time)	level 5(time)
Illumination	1201m(0.8h)	1051m(2h)	601m(5h)	251m(12h)	111m(25h)
Strobe	1201m(1.5h)				
SOS	1201m(2h)	251m(25h)	T15-Q5 parameter		

3. Battery:use one AA battery
4. Size: 105.1mm(L) X21.6mm(D);weight:45g
5. Accessories:one lanyard,two spare O-rings,one tailcap

Instruction

1. Install the battery as shown in the figure

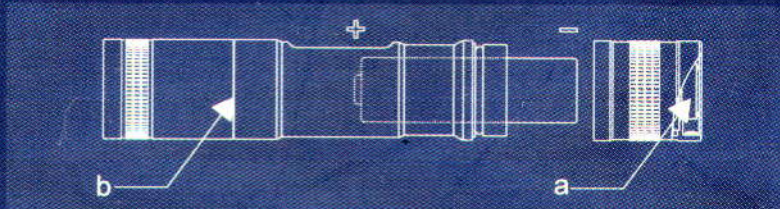

Warning: misplacing the battery may do damage to the flashlight

2. power switch
Press the button on the tailcap (notation "a") can turn on/off the power(touch it will change it to the mode Switch).
Mode switch
Default mode is illumination mode when power on;
touch the button will change it to strobe mode; the same operation will change it to SOS mode.
3. Brightness adjust(twist switch)
Twist the head of the flashlight (notation "b") in illumination mode can switch brightness in five levels, (Turn the head of the light 1/8 of a turn clockwise and then back 1/8 of turn counter-clockwise) meanwhile, the brightness level will be recorded.
4. In SOS mode, twist the head (notation "b") as above can switch brightness between two levels.

