



GENERAL DATA

Light Form: Large and very concentrated spot, very bright.

Light Intensity (candela) 5,250

Max. Performance (lumens) 900

Beam Distance 145 m / 476 ft

LIGHTING LEVELS

Level 1 900 lumens (~300) - 50 min.

Level 2 600 lumens (~300) - 55 min.

Level 3 300 lumens - 60 min.

Level 4 60 lumens - 4.5h

Level 5 12 lumens - 33h

Level 6 0.5 lumens - 15 days

Strobe Yes

TECHNICAL CHARACTERISTICS

Compatible Batteries: 1x CR123A or 1x RCR123A (rechargeable battery)

Led: Cree XM-L2 LED

Waterproof: IPX8 - 2m

Weight: 1.27oz / 36g (excluding batteries)

Length x Body Diameter: 2.6 in. x 0.83 in / 64 mm x 21 mm

Packaging: Plastic

Package Contents: S1R flashlight, lanyard, pouch, user manual, MCC magnetic charging cable, 550mAh 5C RCR123A battery

WARRANTY

5 year warranty

S1R Baton Turbo S

The S1R baton (S1R) is a side-switch, rechargeable EDC flashlight, powered by one RCR123 rechargeable lithium battery of high discharging rate, giving a maximum output of 900 lumens. The TURBO S model includes a 600 lumen mode and improved user interface. It utilizes a Cree XM-L2 LED. Coupled with TIR optic lens of high light transmission rate, it can deliver a balanced beam. S1R has five brightness levels and a strobe mode, covering an output range of 0.5 to 900 lumens. The outer appearance of the S1R follows the style of BATON Series. It comes with a magnetic charging cable. You may use a desktop micro-dok as an optional charger, which makes it easier to acquire the power source whether at home or outdoors, and make sure the flashlight is always ready to bring brightness to your life at any time.

FEATURES

- Cree XM-L2 LED
- Powered by a 550mAh RCR123 customized battery of five times discharging rate, giving a maximum output up to 900 lumens
- The flashlight can be charged through the magnetic contact charging port (other batteries may also be used in S1R, but cannot be charged)
- New 750mA portable USB charging cable
- Brightness increases or decreases gradually: when the flashlight is switched on/off, it will light up or fade gradually to protect eyes from the stimulation caused by sudden brightness changes
- Flat magnetic tailcap that allows it to be secured to ferrous metal surfaces as a hands-free option
- Lockout mode can be activated on the side switch for accidental triggering protection, along with a low-voltage indicator underneath
- Reverse polarity protection circuits
- Timer Setting: Short (3 minutes) and long (9 minutes)
- The standby current is below 30uA

AVAILABLE ACCESSORIES

- Lanyard
- Pouch
- User Manual
- Micro dok (optional)
- MCC Magnetic Charging Cable
- 550mAh 5C RCR123A Battery



Magnetic tailcap allows for easy charging and "sticking" the light where you want it.



Simple and convenient USB charging from portable devices.



Available at www.KF7P.com
Chris@KF7P.com 801-231-2658



S1R BATON

RECHARGEABLE VARIABLE-OUTPUT
LED FLASHLIGHT

MAX OUTPUT



900
LUMENS

MAX RUNTIME



15
DAYS

MAX THROW



145
METERS

BATTERY



1x
RCR123A OR
CR123A

DROP TEST



1.5
METER

WATERPROOF




IPX 8



COMPACT AND LIGHT WEIGHT

The SIR Baton features a slim and compact body that weighs only 1.27 oz/ 36 g without battery installed. With a body length of 2.6"/64mm and a bezel diameter of 0.83"/21mm, this flashlight can easily fit into your pocket, attach to a belt, or backpack strap.

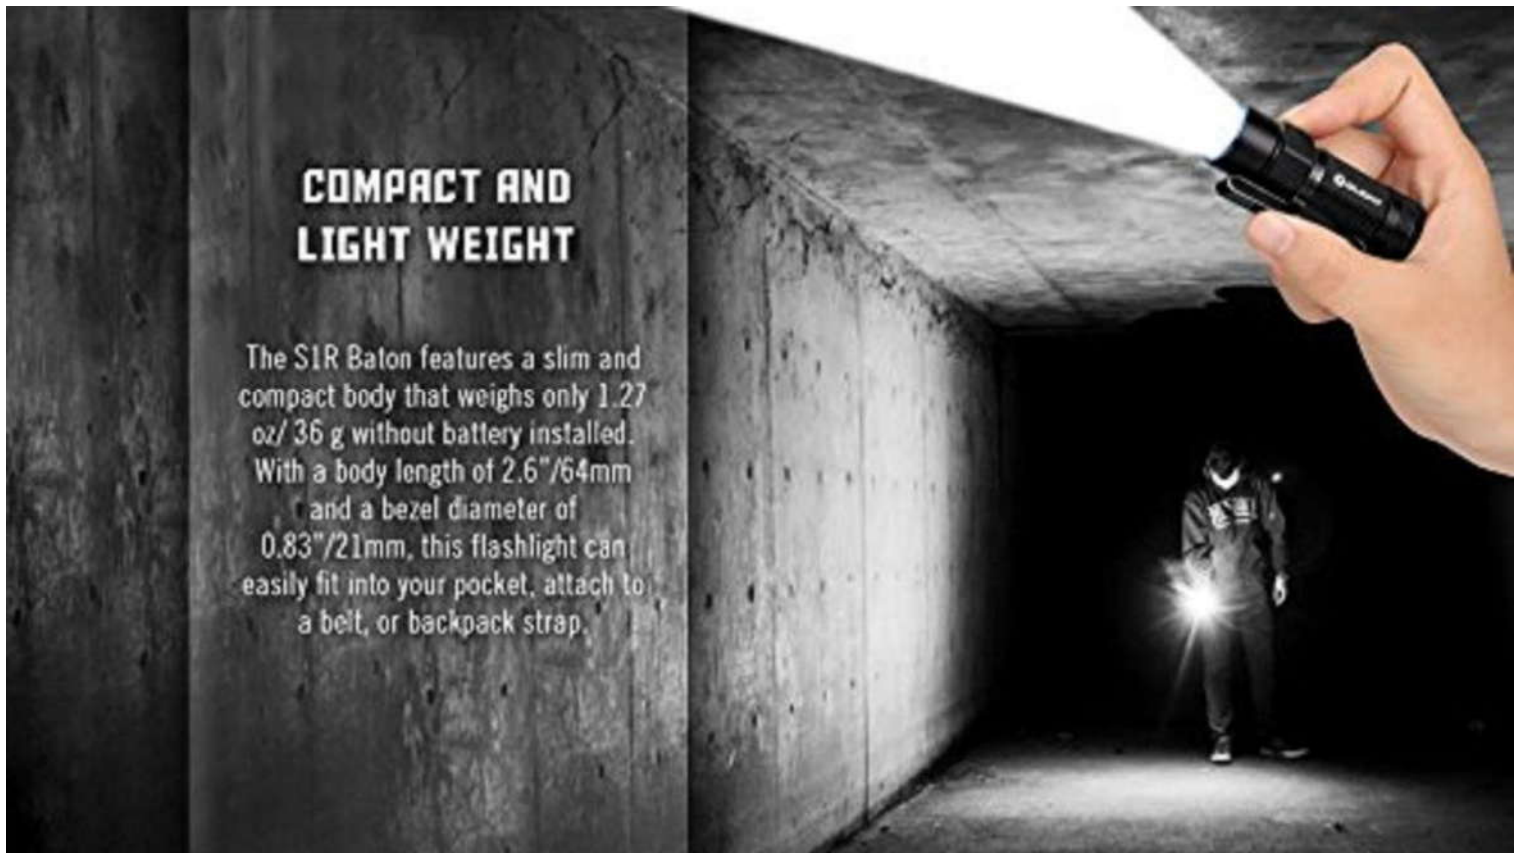

INNOVATIVE CHARGING

Easily connect the included USB charging cable to an external USB source, such as computers, power banks, portable batteries or wall chargers, and attach the circular base to the tailcap end of the light to charge. The power indicator glows red while the flashlight is being charged and glows green when the flashlight is fully charged.





Whether you're backpacking, camping, or walking the dog, the S1R Baton is the perfect solution for any dark situation. Use the S1R's hardened stainless steel pocket clip on your backpack, belt, or pocket for easy access. The S1R also features a magnetic tailcap that allows users to secure it to any metallic objects, making it perfect for hands-free mechanic work.

LOCKOUT MODE & LOW-VOLTAGE INDICATOR

With light is off, press and hold the side switch past moonlight to go into lockout mode. Side switch will glow red when pressed while in Lockout Mode.

To exit Lockout Mode, hold down the side switch again until there is light to activate the flashlight.

Red light will indicate when battery is low.



FREE SHIPPING ON DOMESTIC ORDERS OVER \$75

MY ACCOUNT CHECKOUT LOG IN SIGN UP

Your Cart

Search our store

BATTERIES, CHARGERS & STORAGE SOLUTIONS	EVERYDAY CARRY GEAR	FLASHLIGHTS, BODIES, PARTS, & ACCESSORIES	LIMITED EDITION / CUSTOM PRODUCTS	MORALE PATCHES
LENSES, OPTICS, DRIVERS, PCBS	BAN TANG KNIVES	LASER COMPONENTS & TOOLS	PIXELPUSHER INTELLIGENT LIGHTING	SHOP BY BRAND

[Home](#) > [Olight S1R Rechargeable Flashlight XM-L2 900 lumens \(battery included\)](#)

Olight S1R Rechargeable Flashlight XM-L2 900 lumens (battery included)

SKU:1202

Availability: In Stock

\$55.00

PRODUCT DETAILS

The S1R baton (S1R) is a side-switch, rechargeable EDC flashlight, powered by one RCR123 rechargeable lithium battery of high discharging rate, giving a maximum output of 900 lumens. It utilizes Cree XM-L2 LED. Coupled with TIR optic lens of high light transmission rate, it can deliver a balanced beam. S1R has six brightness levels and a strobe mode, covering an output range of 0.5 to 900 lumens. The outer appearance of S1R follows the style of BATON Series. It comes with a magnetic charging cable.

Key Features:

- Cree XM-L2 LED
- Powered by a 550mAh RCR123 customized battery of five times discharging rate, giving a maximum output up to 900 lumens
- The flashlight can be charged through the magnetic contact charging port (other batteries may also be used in S1R, but cannot be charged)
- New 750mA portable USB charging cable
- Brightness increases or decreases gradually: when the flashlight is switched on/off, it will light up or fade gradually to protect eyes from the stimulation caused by sudden brightness changes
- Flat magnetic tailcap that allows it to be secured to ferrous metal surfaces as a hands-free option
- Lockout mode can be activated on the side switch for accidental triggering protection, along with a low-voltage indicator underneath
- Reverse polarity protection circuits
- Timer Setting: Short (3 minutes) and long (9 minutes)
- The standby current is below 30uA

Specifications:

LED: Cree XM-L2 CW
 Modes: 900->300 / 600->300 / 300 / 60 / 12 / 0.5 lumens
 Runtime: 1.5 -> 50m / 1.5 -> 55m / 1h / 4.5h / 33h / 15d
 Beam Distance: 475ft / 145m
 Peak Beam Intensity: 5,250 cd
 Water Resistance: IPX-8 (waterproof up to 2 m)
 Drop Resistance: 5 ft / 1.5 m
 Battery Type: 1 x CR123A / 1 x RCR123A
 Weight: 1.90oz / 54.0g (Excluding batteries)

Notice: Turbo S mode of 900 lumens and Turbo mode of 600 lumens are tested when the battery is full. The maximum output varies as the battery voltage changes. When the battery voltage runs below 3.6V, the Turbo S cannot reach 900 lumens then, and when the voltage goes down to 3.1V, the Turbo S almost performs the same as Turbo mode. When the voltage drops below 3.1V, the maximum output is 300 lumens only. In order to achieve max brightness the included high discharge proprietary battery MUST be used. Other batteries may be used in the S1R but they will not recharge and will not achieve max brightness.

Dimensions:

- Body Length: 2.60in / 66 mm



Included Accessories

- Lanyard
- Pouch
- User Manual
- MCC Magnetic Charging Cable
- 550mAh 5C RCR123A Battery

MANUFACTURED BY : Olight

ADD TO CART

QUANTITY 



FREE SHIPPING ON DOMESTIC ORDERS OVER \$75



CALL US 9AM-5PM PST (M-F) @ (408)800-1051

CATEGORIES

Flashlights

- Armytek(0)
- Zebralight(2)
- Thrunite(24)
- Xeno(3)
- Olight(67)
- Sunwayman(5)
- Bodies, Bezels, Parts, & Dropins(27)
- Eagletac(0)
- FourSevens(6)
- Jetbeam(12)
- Nitecore(133)
- Mecarmy(13)
- SureFire(0)
- Xtar(2)
- Atactical / Wowtac(6)
- Folomov(7)
- Malkoff Devices(9)
- Imalent(4)
- Acebeam(44)
- Rovyvon(30)
- Lumintop(23)

Every Day Carry Gear (EDC)

- Keychain Fobs, Clips, GiTD(20)
- Pens, Tools(6)
- Knives, Utility Blades(6)

Off-Road LED Light Bars & Pods

- LED Light Bars(2)
- LED Pods(4)
- Wiring and mounting accessories(1)

Special Deals

Batteries, Chargers, Battery Holders, PVC Wrap, and Terminal Protectors

- Battery Carriers(70)
- Batteries(123)
- Chargers(68)
- PVC Battery Wrap & Battery Terminal Protectors(27)

Laser Components & Tools

- Ether Dream(1)
- Radiant Electronics(0)
- Laser Components(1)

PV Devices, Drivers, & Accessories

- Tools(0)
- Ranger Box Mods(6)
- PV Drivers(1)
- Mod & Battery Holders / Cases(18)
- Atomizers(1)
- Kanthal Resistance Wire(5)
- Miscellaneous(1)

LED, Driver, Optic, MCPCB, Wire, Thermal Compound

- LED Drivers(5)
- LED Optics(4)
- Cree LEDs(7)
- Nichia LEDs(1)
- LED MCPCBs(6)
- Silicone Wire(8)
- Thermal Compounds(6)

PixelPusher & LED Strips

Miscellaneous

Headlamps

Ban Tang Knives

- SAF(4)
- Low Volume / Custom(4)

Morale Patches

Limited Edition / Custom Products

[Nickel Non Resistance Wire\(4\)](#)

Black Friday Deals

CONTACT US

support@illuminationssupply.com

Office Phone:

(408) 800-1051

Monday - Friday

9:00AM -5:00PM (PST)

Closed - Sat. & Sun

Address:

774 Charcot Ave.

San Jose, CA 95131

SUPPORT

[Contact Us](#)

[Store Location](#)

[Order Status](#)

[Shipping and Return Policy](#)

[My Account](#)

RESOURCES

[Wholesale Account Sign Up](#)

[Subscribe to our Newsletter](#)

[Privacy Policy](#)

[Terms and Conditions](#)

SOCIAL

 [Facebook](#)

 [Instagram](#)



COPYRIGHT © 2020 ILLUMINATION SUPPLY LLC. ALL RIGHTS RESERVED.