### Olight SR95 Intimidator Ultra Throw (SR95UT)



The **Limited Edition** SR95UT offers an impressive modification to Olight's already capable SR95 Intimidator rescue light. The SBT-90 LED and specially designed reflector are coupled to deliver a light with the ultimate throwing capabilities. Illumination for up to 830 meters (about 900 yards) is possible with this light, making it an industry leader in performance.

A tough, full-bodied aluminum body holds a high capacity 7800 mAh, 7.4v rechargeable lithium battery. The body also features a charge indicator and integrated port for easy recharges. The unique engineering of the head and reflector features a "Hollow out" design for optimum heat dissipation and weight distribution. This gives the SR95UT a balanced feel in the hand without too much weight at the head of the light.


Three output modes, constant and momentary on functions, and an incredibly brilliant strobe can be accessed with the large format side switch designed for rapid and comfortable use, even in thick gloves.

#### Olight SR95 Intimidator Ultra Throw (SR95UT)

#### **Features and Specifications:**

- Output/Run Time:
  - High: 1050 lumens/115 minutes
    Medium: 300 lumens/10 hours
    Low: 60 lumens/48 hours
- Dimensions:
  - Length: 12.8" (325mm)
    Head Diameter: 3.5" (90mm)
    Body Diameter: 2" (48.4mm)
    Weight: 2.7 lbs (1230.5g)
- Color: Black
- LED: Luminus SBT-90 LED
- Material: Aluminum body with anti-scratching type III Hard Anodizing
- Battery: 7800mAh 7.4V rechargeable lithium battery
- Charger: AC 100 -220V 50~60HZ input . Recharge under constant current and voltage) C3A/8.4V
- Smooth reflector
- Lens: Tough ultra-clear tempering glass, with anti-reflective coating
- Striking bezel: Aluminum body with anti-scratching type III Hard Anodizing
- Large side switch for easy activation, even in thick gloves
- Features two gold plated, metal O Rings
- Anti-slip ergonomic knurling
- Beam intensity in center: 129600 candela
- Maximum throw: 820 meters
- Waterproof rating: IPX6
- Impact resistant up to 1.5 meters
- Limited Edition

Olight SR95 Intimidator Ultra Throw (SR95UT)

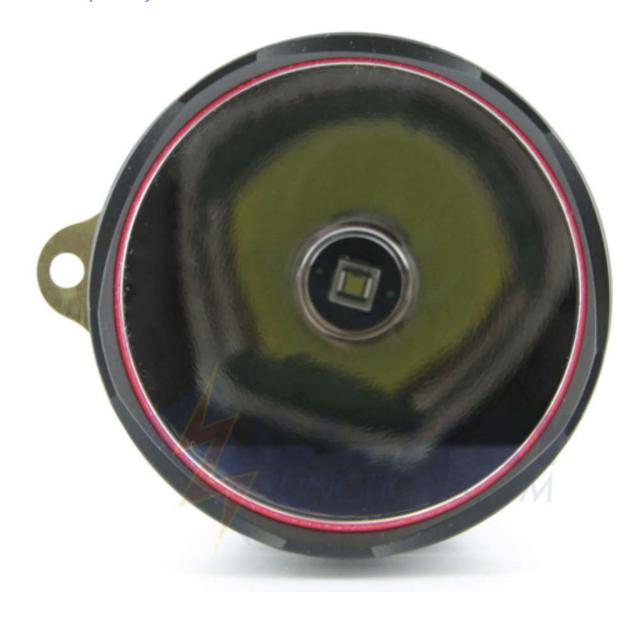



## www.olightworld.com

• Extremely high optical output:

Over 1,300 lumens at 9.0A from a single chip (white)


High thermal conductivity package junction to case thermal resistance of only 0.64 °C/W.

- Large, monolithic chip with uniform emitting area of 9 mm2
- Unencapsulated die with low profile
  protective window optimizes optical
  coupling in etendue-limited applications

• Lumen maintenance of greater than 70% after 70,000 hours

Variable drive current: less than 1 A through 9 A

- Electrically isolated thermal path
- Environmentally friendly: RoHS compliant

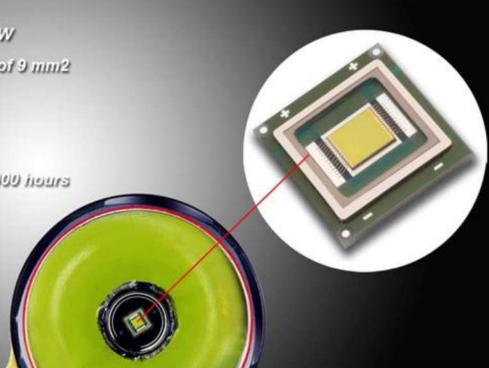





## www.olightworld.com



Brightness 1 / Runtime \* 1050 lumens / 1h55 min

Brightness 2 / Runtime \* 300 lumens / 10h

Brightness 3 / Runtime \* 60 lumens / 48h

Brightness 4 \* Strobe 10HZ / 3h50min

# SR95 INTIMIDATOR Max throw 720 meters

Brightness 1 / Runtime \* 2000lumens / 1h50min

Brightness 2 / Runtime \* 600 lumens / 9h30min

Brightness 3 / Runtime \* 120 lumens / 46h

Brightness 4 \* Strobe 10HZ / 3h40min





• super light intensity



www.olightworld.com

## Ultra-throw ability, max throw 820 meters,

Create new era of long throw LED flashlight with single emitter!



SR95 INTIMIDATOR UT

