Olight i5T Raw Brass



GENERAL DATA

Beam Distance (ft) 196
Beam Distance (m) 60
Max. Performance (lumens) 300

Charge type Optional Charger

Compatible Batteries 1.5V AA Alkaline Battery (included) /AA NiMH Battery (compatible)

Light Intensity (candela) 910

Light Form Wide/Broad Hotspot. Perfect for up close illumination.

Lens / Reflector Type PMMA Optic Lens (big, defined wide hotspot)

Mode Operation Tail Switch

Form/Size Factor Small Size (Car key / Zippo Lighter)

Series Series I

LIGHTING LEVELS

LEVEL 1 (lumens) 300~150~30

Run-time LEVEL 1 • 3+25+122 mins

LEVEL 2 (lumens) 15

• 20 hrs

Strobe No
SOS / BEACON No
TECHNICAL CHARACTERISTICS

Waterproof IPX8

Weight (g / oz) 101.5/3.6 Length (mm / in) 95/3.74 Head Diameter (mm / in) 17.8 / 0.7

Olight i5T Raw Brass

GENERAL DATA

Body Diameter (mm / in) 17.8 / 0.7

Led High Performance Cool White LED

Packaging Carton Blister


keychain, everyday carry, gift, outdoor, home Use


i5T EOS Brass (1.5V AA Alkaline Battery Included) X 1

Pocket Clip X 1

Package Contents User Manual x 1



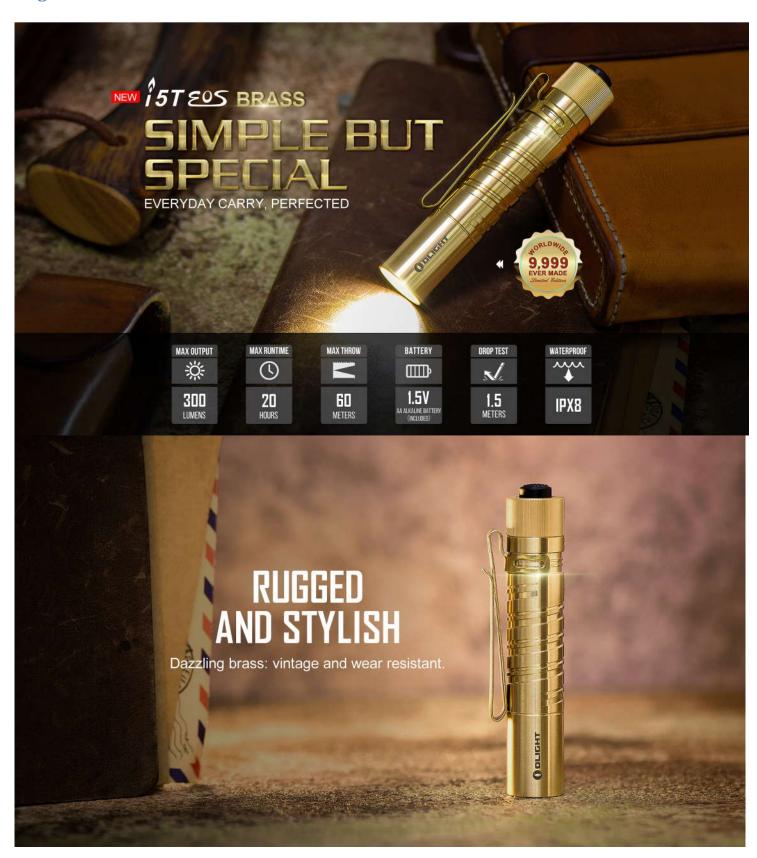

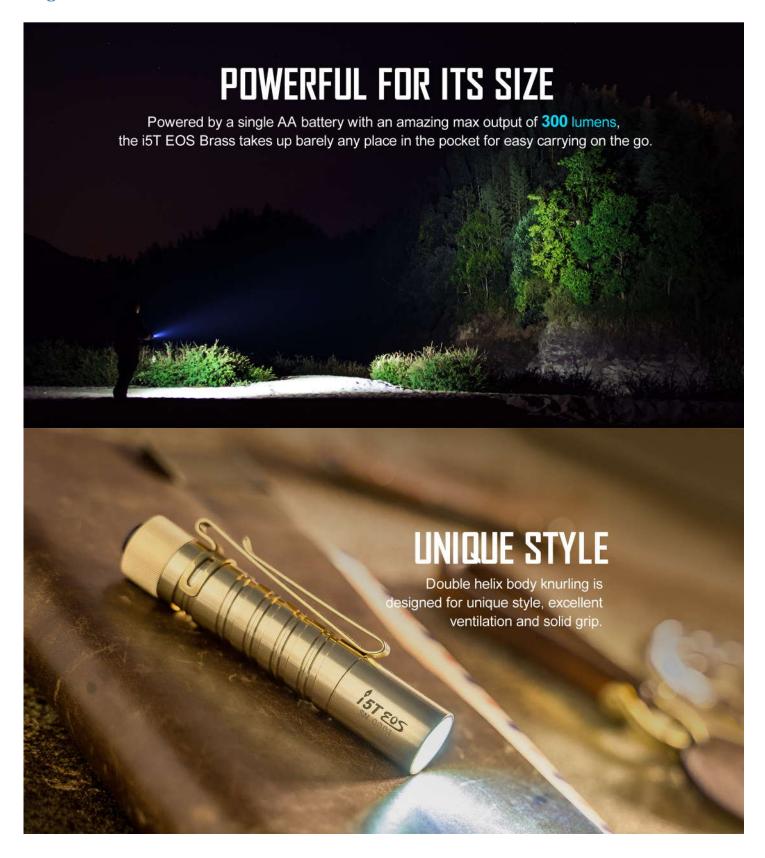

Olight i5T Raw Brass



