

Olight New Product Launch

“M21X-L2 Warrior”

M21X Warrior XM-L2 Edition (M21X-L2 for short) is a tactical flashlight with tail switch. It is assembled the latest CREE XM-L2 LED with maximum luminous flux up to 750lm. Born with solid and strong structure, together with Olight's various tactical accessories such as weapon mount, filter, and tactical remote switch etc, M21X-L2 can be widely used in the area of government agencies, law enforcement, military, hunting and so on.



OLIGHT
We Make A Difference

www.olightworld.com

**Eternal Classic,
Perfect Upgrade**

Latest CREE **XM-L2** LED,
with maximum **750lm** output

M21X-L2 WARRIOR

 **OLIGHT**
We Make A Difference

www.oightworld.com



Smooth Reflector, High Luminousness Lens

Wide Teeth Rectangle Thread

Multifunctional tail switch

Stainless steel striking bezel

Military standard type III hard anodization

Strong removable clip

M21X-L2 WARRIOR

 **OLIGHT**
We Make A Difference

www.oightworld.com

Best Light Source:
XM-L2 LED Based on Cree SC3 Technology Platform
in The Lead of Industry




Long Beam Distance:
Special designed smooth reflector
Beam distance up to **288** meters

M21X-L2 WARRIOR

Tactical User Interface

Full Press: Turn ON or OFF

Light Press: Momentary-ON


Special
operating
mode

Quickly Twice Press: High

Quickly Triple Press: Strobe



M21X-L2 WARRIOR

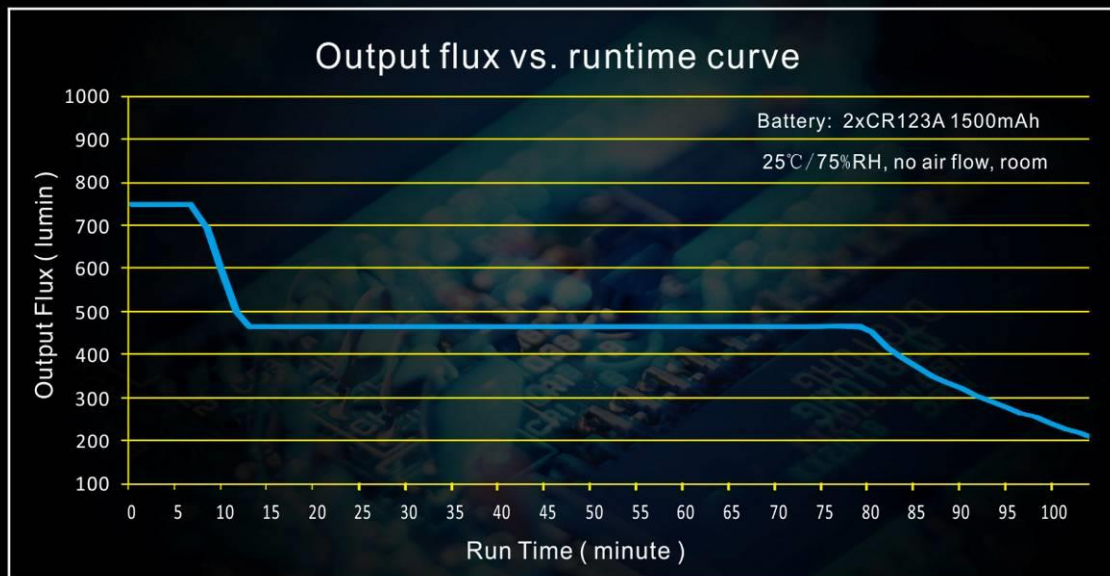

M21X-L2 WARRIOR

Beam Shot:


3 Brightness Levels and Strobe



20 lumens



320 lumens



750 lumens

M21X-L2 WARRIOR



Water proof: IPX-8




M21X-L2 WARRIOR

5

*years quality warranty,
high assurance!*



All the tests are carried out consistent with the ANSI standard, with 2*CR123A (1500mAh) batteries.

				
750lumens	20,700cd	288m	2m	2m

M21X-L2 WARRIOR

Data Table

	Light Output – Hi / Med / Lo	750 lm / 320 lm / 20 lm
	Run Time	1.5h / 3h / 30h
	Battery Type	2xCR123A or RCR123, 1x18650
	Light Source	Cree XLamp XM-L2
	Peak Beam Intensity	20,700 cd
	Beam Distance	288 m
	Weight	126.5 g (Without Battery)
	Dimension	(D)40.2 mm x (L) 145.5mm / (D)1.6 in x (L) 5.7 in
	Water Proof	IPX8 30min under 2 meter water
	Impact Resistant	2m drop test

M21X-L2 WARRIOR

Package Details:

a) Standard accessories: (deluxe packing)

Flashlight x 1; Lanyard x 1; Spare O-Rings x 2; White Diffuser x1; CR123A x 2; Holster x 1; Battery Magazine x 1; Silicon Rubber Boot (fluorescence) x 1; Manual; Warranty Card

b) Standard accessories (ordinary packing)

Flashlight x 1; Lanyard x 1; Spare O-Rings x 2; Battery Magazine x 1; Silicon Rubber Boot (fluorescence) x 1; Manual; Warranty Card

c) Optional accessories (sold individually)

Olight Brand CR123A Lithium Battery 3V 1500mA

OLIGHT Weapon Mount WM20

OLIGHT Magnet Weapon Mount X-WM01

OLIGHT Magnet Weapon Mount X-WM02

Stainless steel striking bezel

Traffic wand (white, orange)

Filter (white, red, green, blue)

Remote pressure switch

Features:

- a) Utilizing the newest Cree XM-L2 LED, output increased by 20%
- b) High-efficient drive circuit, the highest output reaches 750umens, and beam distance is up to 288m
- c) Multi-functional tail switch: Under off status, lightly press the tail switch will perform momentary-on, while twice quick clicks will activate high brightness and triple quick clicks will activate strobe, further full press will acquiesce in outputs. Under on status, full press the tail switch will perform power off.
- d) Three adjustable brightness levels (low-medium-high), changeable in cycle through screwing the head from loose to tight
- e) Anti-rolling cigar holder is convenient for steady holding the flashlight; and there is a 3mm diameter hole can pass through fabric strap
- f) Aviation grade aluminum body, with anti-scratch type III hard anodizing
- g) Blackening treatment stainless steel striking bezel also available
- h) Time limit high brightness steps down. After 5 minutes running, output on high will drop down to 60%. Restart the flashlight or reactivate the high brightness level to recover
- i) Smooth reflector
- j) High-efficient optical system: 96% transmission rate ultra-clear lens combined with special designed deep smooth reflector

- k) Flexible connectors for both negative electrode and positive electrode.
- l) Equipped with CR123A battery magazine
- m) Battery polarity reverse protection