




i3S-CU EOS USER MANUAL

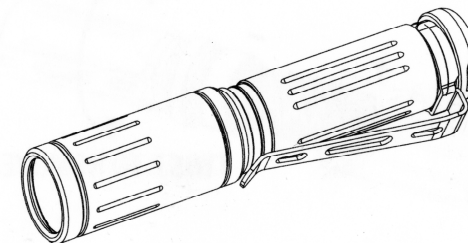

Thank you for purchasing the Olight flashlight!
Please read this manual carefully before
using this product.

INSIDE THE BOX

i3S-CU EOS, AAA Alkaline battery, manual

WARRANTY

Within 30 days of purchase: Return to retailer from which you purchased for repair or replacement.

Within 5 years of purchase: Return to Olight for repair or replacement.

This warranty does not cover normal wear and tear, modifications, misuse, disintegrations, negligence, accidents, improper maintenance, or repair by anyone other than an Authorized retailer or Olight itself.




BATTERY AND SAFETY WARNINGS

- Do not use unsupported batteries with this flashlight.
- Do not get the battery reversed.

HOW TO OPERATE

- Insert the battery (included) into the flashlight as the figure shown, with the positive end of the battery toward the head of the flashlight.

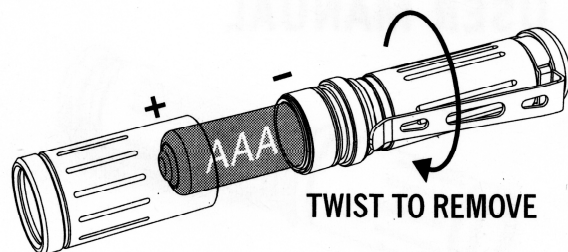

- Fully tighten the head to turn flashlight on, the flashlight outputs at high as default. When the light is on, quickly twist the body of the flashlight counter-clockwise then clockwise. With each back and forth twist, the brightness levels will cycle up then repeat medium-low-high. Do not over loosen the head.

Technical Support Inquiries
techsupport@olightworld.com

Customer Service
service@olightworld.com

Visit www.olightworld.com to see our complete product line of portable illumination tools.



Olight Technology Co., Limited
2/F East, Building A, B3 Block, Fuhai
Industrial Park, Fuyong, Bao'an District,
Shenzhen, China 518103

MADE IN CHINA



www.DrMemory.com

SPECIFICATIONS

	AAA Alkaline	AAA NiMH
HIGH	180~90 lumens / 3+42 min	180~90 lumens / 3+67 min
MEDIUM	20 lumens / 10 hrs	20 lumens / 12.5 hrs
LOW	2 lumens / 96 hrs	2 lumens / 132 hrs
LED	CREE XP-L CW	
VOLTAGE	0.9v~2.0v	
CANDELA	625 cd	
BEAM DISTANCE	50 meters/ 164 feet	
BATTERY TYPE	1 x AAA ALKALINE or NiMH	
BODY TYPE	Brass material body, Stainless steel clip	
WATERPROOF	IPX8 (UP TO 2 meters)	
IMPACT RESISTANCE	1.5 meters	
DIMENSIONS	L 69.5mm x D 14mm / 2.74 in x 0.55 in	
WEIGHT without battery	26.5g / 0.93 oz	

All performance claims to ANSI/NEMA FL1-2009 Standard.